INSTALLATION INSTRUCTIONS
Rear Fender Rack Kit
1TP-F48C0-V0
XVS95CE (Bolt)

DEALER OR INSTALLER:
These instructions contain important information for future reference and *must* be given to the customer.

⚠WARNING
Read and understand these instructions completely before installation to avoid possible injury, as well as possible damage to the accessory or vehicle.

WARRANTY INFORMATION:
Genuine Star Accessories are covered by a one-year limited warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. See your Yamaha dealer for a copy of the warranty statement.

PARTS LIST:
This kit contains the following components. Before beginning installation, confirm there are no missing or damaged components.

Item	Part Number	Description	Qty
--	1TP-F48C0-V0	Rear Fender Rack Kit	--
①	*	Rear Fender Rack	1
②	*	Short Hex Bolt, Socket Button (M8 x 35mm)	2
③	*	Long Hex Bolt, Socket Button (M8 x 40mm)	2
④	*	Special Spacer, Rear (Short)	2
⑤	*	Special Spacer, Front (Long)	2

* Part supplied with kit only and not available separately.

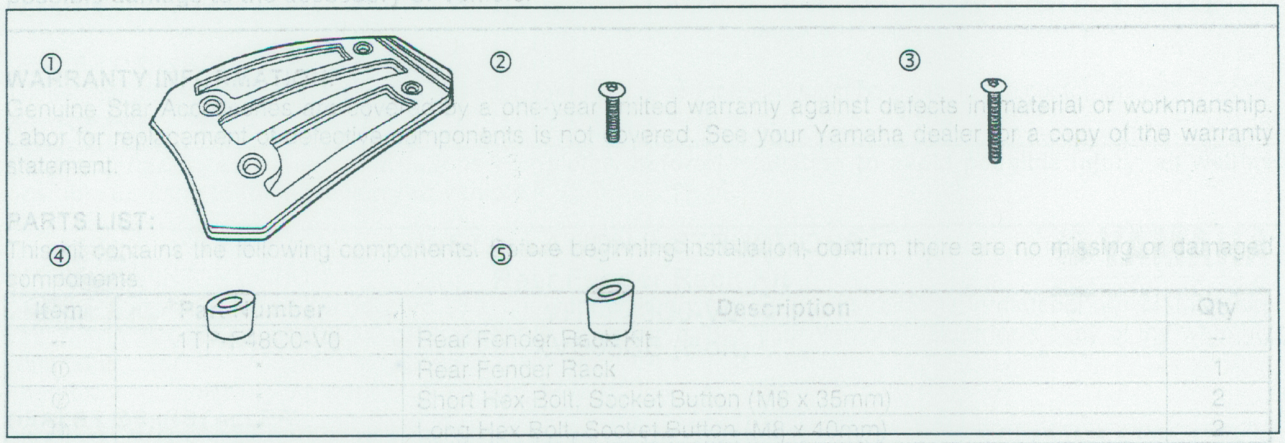

Fig. 1

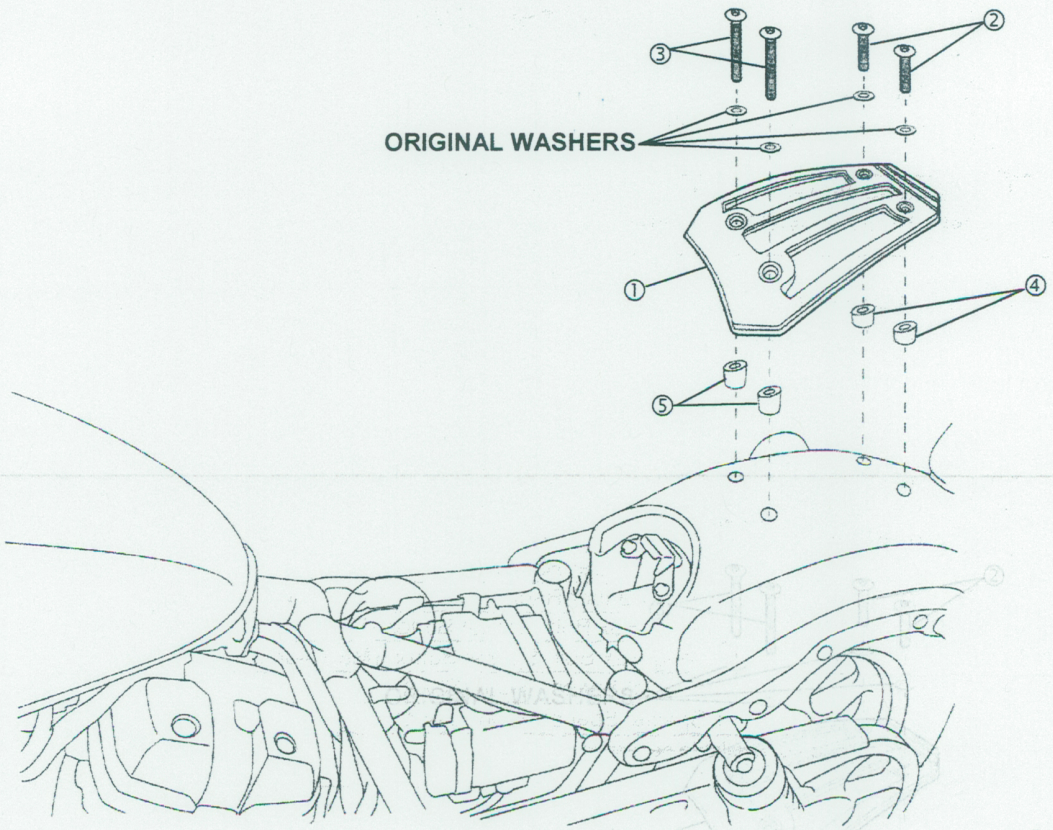

PREPARATION:

1. Place motorcycle on a secure and level surface.
2. Remove the four 8mm bolts and washers located on the top of the rear fender. Retain the washers as they will be reused.
3. Clean all mounting surfaces before beginning installation.

INSTALLATION:

1. Mount the rear fender rack using the two long spacers ⑤ with the two long hex bolts ③ and original washers in the front, and the two short spacers ④ with two short hex bolts ② and original washers in the rear (Fig. 1). The angled cut on all the spacers faces upward while the flat surface of each spacer sits against the fender.
   TIP:
   Before tightening the bolts, rotate the spacers so their angled surface matches the curved surface of the rack.
2. Tighten the bolts to specification:
   20 Nm (2.0 m-kg, 14 ft-lb).

⚠WARNING

Overloading can reduce control and lead to an accident.
RACK LOAD LIMIT: 10 LB (4.5 KG)

MAINTENANCE:

Periodically, check torque on all hardware. If loose hardware is found, re-torque to specification.

CARE AND CLEANING:

Wash using a mild soap and water solution and a soft cloth.

CUSTOMER SERVICE:

For further information, see your Yamaha dealer.

ESTIMATED TIME TO INSTALL: 0.1 HRS